

GENESIS 1000

GOUGING

Specifications:

Input Supply Switching Device Input KVA @ 1000A Current Range Current @ 60% Duty Current @ 100% Duty 330-500, 50Hz/60Hz, 3Phase IGBT 51 KVA 30A - 1000A 1000Amps 775Amps Max OCV Class of protection Dimensions (WxLxH)mm Weight 95 - 105 V IP21 460 x 1125 x 945 mm 182kg

APS provides the most class , GENESIS 1000 reliable in its gouging equipment. The Genesis series is well known in the market for its simplicity, reliability, ruggedness and is capable of the customer serving in environment. Genesis series is designed to work under wide voltage fluctuations, protected against Over Voltage, Under Voltage, Over Heating, Over current for IGBT protection with indication, Phase error detection. On Load Power Consumption upto 50% lesser than conventional Non-inverter type welding equipment.

Protection features:

OV - Over Voltage (Indicates supply voltage above 500V)

UV - Under Voltage (Indicates supply voltage below 330V)

OC - Over Current (IGBT Over Current Indication)

OT - Over Temperature (Internal temperature above 70deg)

SP - Single Phase loss (One of Phase is not connected)










Accessories

Gouging Torch














Panel Description:

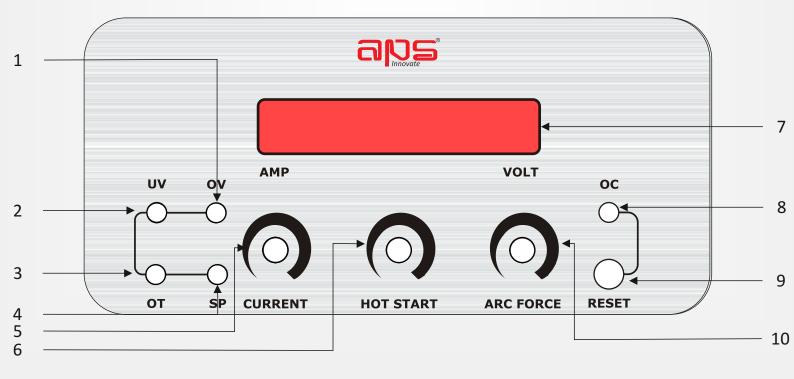

- 1 OV Over Voltage Indicator
- 2 UV Under Voltage Indicator
- 3 OT Over Temperature
- 4 SP Single Phase [Supply] Indicator
- 5 Current Control KNOB

- 6 Hot Start Variation KNOB
- 7 LED Display [Ammeter and Voltmeter]
- 8 OC Over Current Indicator
- 9 OC Reset Button
- 10 ARC Force Variation KNOB

- Excellent Arc characteristic over entire range.
- Stepless Voltage selection.
- Digital Ammeter and Voltmeter.
- Forced Air cooling for longer unit life.
- Class H insulation.

AUTHORISED DEALER

ADVANCED POWER SOURCES LIMITED WELDING - CUTTING - GOUGING - AUTOMATION - ACCESSORIES